

Network Programming

Dr. Thayer Hayajneh

Computer Engineering Department

TCP Protocol


Outline

- Connection-oriented transport: TCP
 - segment structure
 - reliable data transfer
 - flow control
 - connection management
- Principles of congestion control
- TCP congestion control


TCP: Overview

RFCs: 793, 1122, 1323, 2018, 2581

- **point-to-point:**
 - one sender, one receiver
- **reliable, in-order byte stream:**
 - no "message boundaries"
- **pipelined:**
 - TCP congestion and flow control set window size
- **send & receive buffers**
- **full duplex data:**
 - bi-directional data flow in same connection
 - MSS: maximum segment size
- **connection-oriented:**
 - handshaking (exchange of control msgs) init's sender, receiver state before data exchange
- **flow controlled:**
 - sender will not overwhelm receiver



TCP segment structure

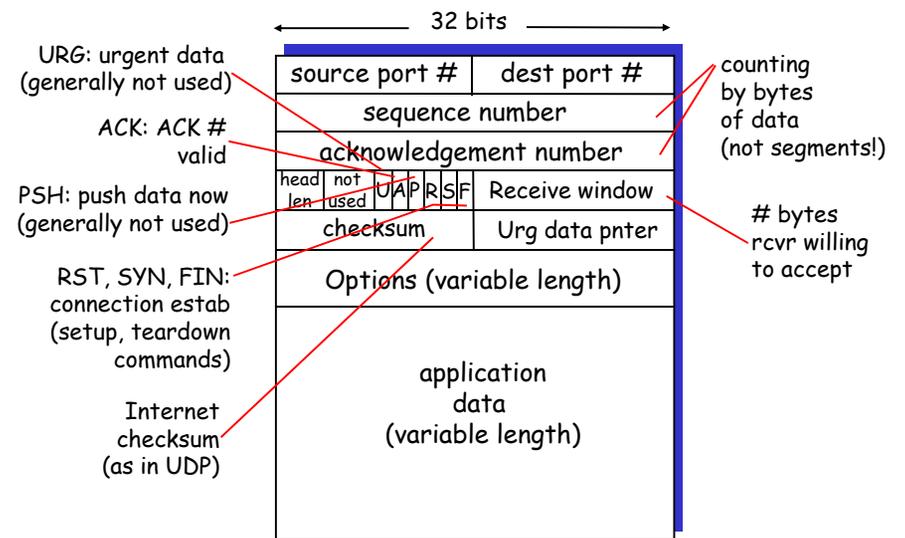

TCP seq. #'s and ACKs

Seq. #'s:


- byte stream "number" of first byte in segment's data

ACKs:

- seq # of next byte expected from other side
- cumulative ACK

Q: how receiver handles out-of-order segments

- A: TCP spec doesn't say, - up to implementor

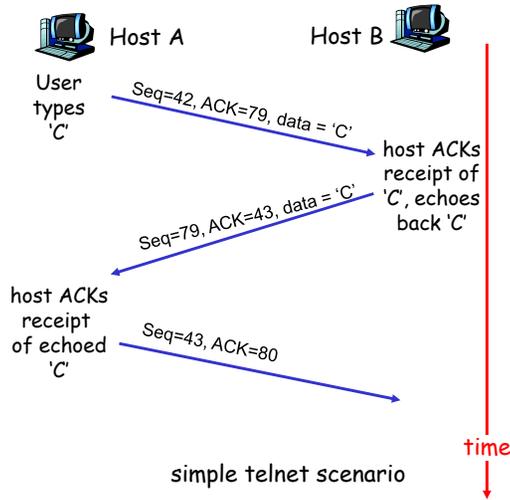

TCP Round Trip Time and Timeout

Q: how to set TCP timeout value?

- longer than RTT
 - but RTT varies
- too short: premature timeout
 - unnecessary retransmissions
- too long: slow reaction to segment loss

Q: how to estimate RTT?


- SampleRTT: measured time from segment transmission until ACK receipt
 - ignore retransmissions
- SampleRTT will vary, want estimated RTT "smoother"
 - average several recent measurements, not just current SampleRTT

TCP Round Trip Time and Timeout

$$\text{EstimatedRTT} = (1 - \alpha) * \text{EstimatedRTT} + \alpha * \text{SampleRTT}$$

- Exponential weighted moving average
- influence of past sample decreases exponentially fast
- typical value: $\alpha = 0.125$

Example RTT estimation:

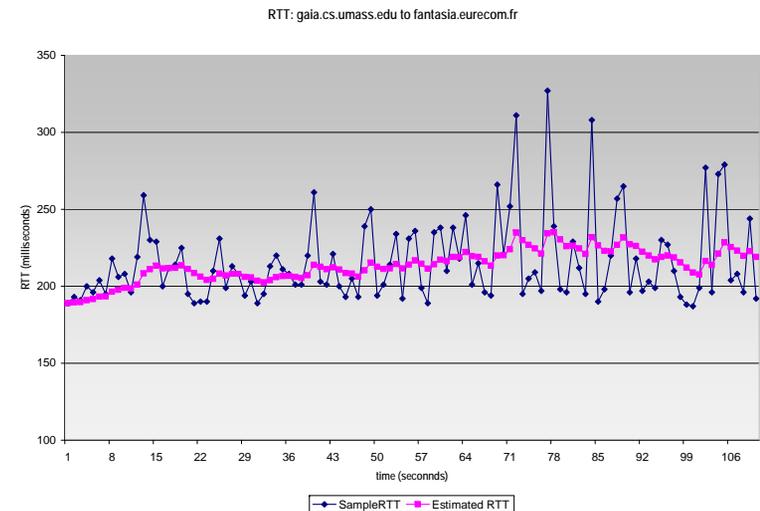

TCP Round Trip Time and Timeout

Setting the timeout

- EstimatedRTT plus "safety margin"
 - large variation in EstimatedRTT -> larger safety margin
- first estimate of how much SampleRTT deviates from EstimatedRTT:

$$\text{DevRTT} = (1-\beta) * \text{DevRTT} + \beta * |\text{SampleRTT} - \text{EstimatedRTT}|$$

(typically, $\beta = 0.25$)

Then set timeout interval:

$$\text{TimeoutInterval} = \text{EstimatedRTT} + 4 * \text{DevRTT}$$

9

TCP reliable data transfer

- TCP creates rdt service on top of IP's unreliable service
- Pipelined segments
- Cumulative acks
- TCP uses single retransmission timer
- Retransmissions are triggered by:
 - timeout events
 - duplicate acks
- Initially consider simplified TCP sender:
 - ignore duplicate acks
 - ignore flow control, congestion control

10

TCP sender events:

data rcvd from app:

- Create segment with seq #
- seq # is byte-stream number of first data byte in segment
- start timer if not already running (think of timer as for oldest unacked segment)
- expiration interval: TimeoutInterval

timeout:

- retransmit segment that caused timeout

- restart timer

Ack rcvd:

- If acknowledges previously unacked segments
 - update what is known to be acked
 - start timer if there are outstanding segments

11

```
NextSeqNum = InitialSeqNum
SendBase = InitialSeqNum
```

```
loop (forever) {
  switch(event)
```

```
  event: data received from application above
    create TCP segment with sequence number NextSeqNum
    if (timer currently not running)
      start timer
    pass segment to IP
    NextSeqNum = NextSeqNum + length(data)
```

```
  event: timer timeout
    retransmit not-yet-acknowledged segment with
      smallest sequence number
    start timer
```

```
  event: ACK received, with ACK field value of y
    if (y > SendBase) {
      SendBase = y
      if (there are currently not-yet-acknowledged segments)
        start timer
    }
```


```
} /* end of loop forever */
```

TCP sender (simplified)

Comment:

- SendBase-1: last cumulatively ack'd byte
- Example:
- SendBase-1 = 71; y = 73, so the rcvr wants 73+ ; y > SendBase, so that new data is acked

12

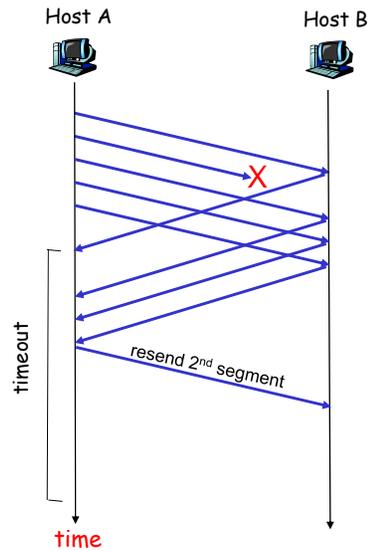

Resending a segment after triple duplicate ACK

Fast retransmit algorithm:

```

event: ACK received, with ACK field value of y
  if (y > SendBase) {
    SendBase = y
    if (there are currently not-yet-acknowledged segments)
      start timer
  }
  else {
    increment count of dup ACKs received for y
    if (count of dup ACKs received for y = 3) {
      resend segment with sequence number y
    }
  }


```

a duplicate ACK for already ACKed segment

fast retransmit

TCP Flow Control

- receive side of TCP connection has a receive buffer:

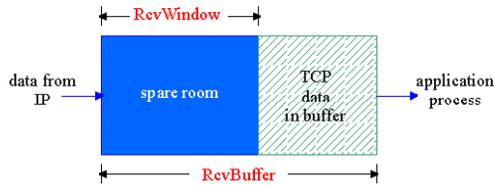


- app process may be slow at reading from buffer

flow control
sender won't overflow receiver's buffer by transmitting too much, too fast

- speed-matching service: matching the send rate to the receiving app's drain rate

TCP Flow control: how it works

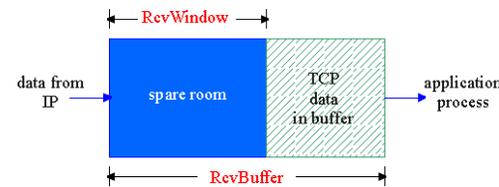

(Suppose TCP receiver discards out-of-order segments)

- spare room in buffer
- = $RcvWindow$
- = $RcvBuffer - [LastByteRcvd - LastByteRead]$

- Rcvr advertises spare room by including value of $RcvWindow$ in segments
- Sender limits unACKed data to $RcvWindow$
 - guarantees receive buffer doesn't overflow

TCP Connection Management

Recall: TCP sender, receiver establish "connection" before exchanging data segments

- initialize TCP variables:
 - seq. #s
 - buffers, flow control info (e.g. RcvWindow)
- *client*: connection initiator
- *server*: contacted by client

Three way handshake:

Step 1: client host sends TCP SYN segment to server

- specifies initial seq #
- no data

Step 2: server host receives SYN, replies with SYNACK segment

- server allocates buffers
- specifies server initial seq. #

Step 3: client receives SYNACK, replies with ACK segment, which may contain data

21


TCP Connection Management (cont.)

Closing a connection:

client closes socket:
`clientSocket.close();`

Step 1: client end system sends TCP FIN control segment to server

Step 2: server receives FIN, replies with ACK. Closes connection, sends FIN.

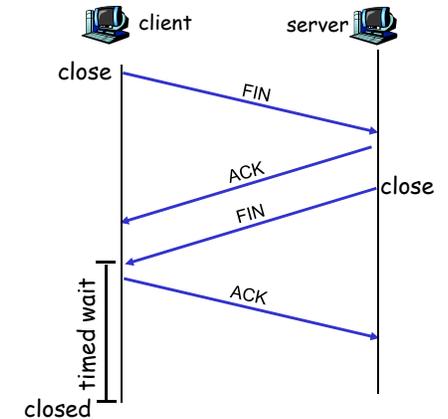

22


TCP Connection Management (cont.)

Step 3: client receives FIN, replies with ACK.

- Enters "timed wait" - will respond with ACK to received FINs


Step 4: server, receives ACK. Connection closed.

Note: with small modification, can handle simultaneous FINs.

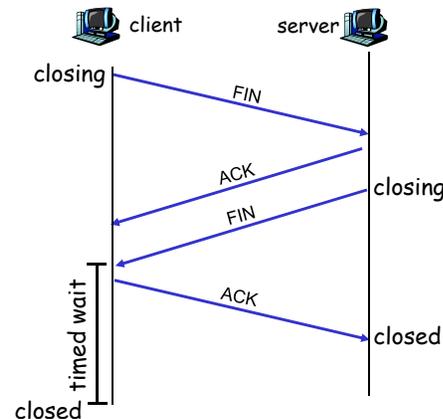

23

TCP Connection Management (cont)

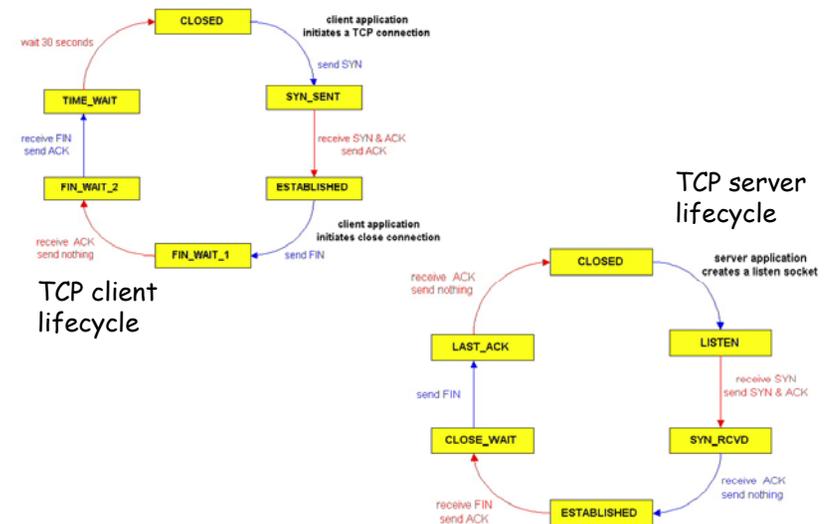

24




Principles of Congestion Control

Congestion:

- ❑ informally: "too many sources sending too much data too fast for *network* to handle"
- ❑ different from flow control!
- ❑ manifestations:
 - lost packets (buffer overflow at routers)
 - long delays (queueing in router buffers)
- ❑ a top-10 problem!

Causes/costs of congestion: scenario 1


- ❑ two senders, two receivers
- ❑ one router, infinite buffers
- ❑ no retransmission

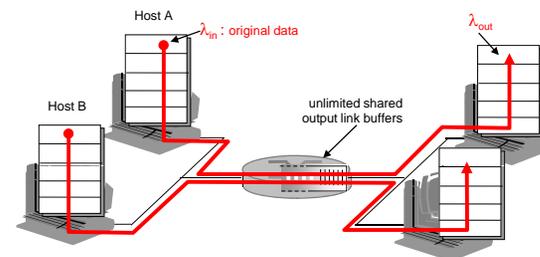

- ❑ large delays when congested
- ❑ maximum achievable throughput


Causes/costs of congestion: scenario 2

- ❑ one router, *finite* buffers
- ❑ sender retransmission of lost packet

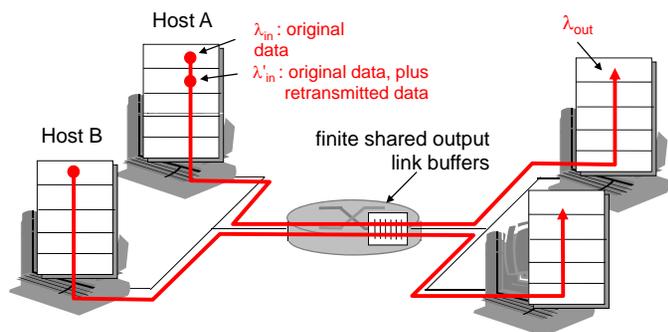


Causes/costs of congestion: scenario 2


- ❑ always: $\lambda_{in} = \lambda_{out}$ (goodput)
- ❑ "perfect" retransmission only when loss: $\lambda'_{in} > \lambda_{out}$
- ❑ retransmission of delayed (not lost) packet makes λ'_{in} larger (than perfect case) for same λ_{out}



a.



b.



c.


"costs" of congestion:

- ❑ more work (retrans) for given "goodput"
- ❑ unneeded retransmissions: link carries multiple copies of pkt

Causes/costs of congestion: scenario 3


- four senders
- multihop paths
- timeout/retransmit

Q: what happens as λ_{in} and λ'_{in} increase ?

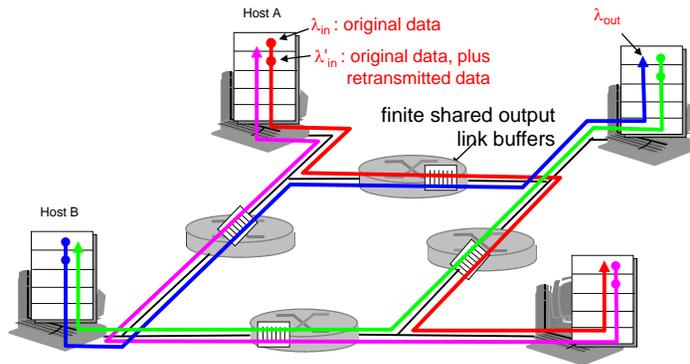

29

Causes/costs of congestion: scenario 3

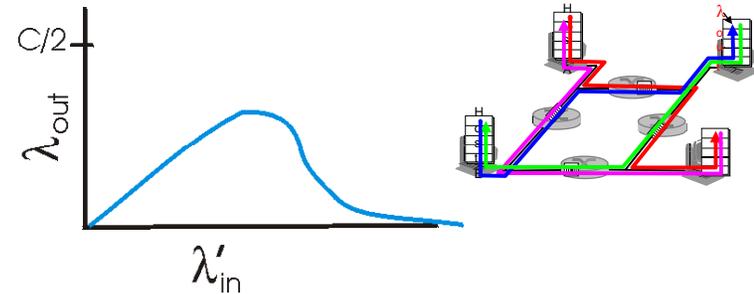

Another "cost" of congestion:

- when packet dropped, any "upstream transmission capacity used for that packet was wasted!"

30

Approaches towards congestion control

Two broad approaches towards congestion control:

End-end congestion control:

- no explicit feedback from network
- congestion inferred from end-system observed loss, delay
- approach taken by TCP

Network-assisted congestion control:


- routers provide feedback to end systems
 - single bit indicating congestion (SNA, DECbit, TCP/IP ECN, ATM)
 - explicit rate sender should send at

31

TCP congestion control: additive increase, multiplicative decrease

- Approach: increase transmission rate (window size), probing for usable bandwidth, until loss occurs
 - additive increase: increase CongWin by 1 MSS every RTT until loss detected
 - multiplicative decrease: cut CongWin in half after loss

Saw tooth behavior: probing for bandwidth

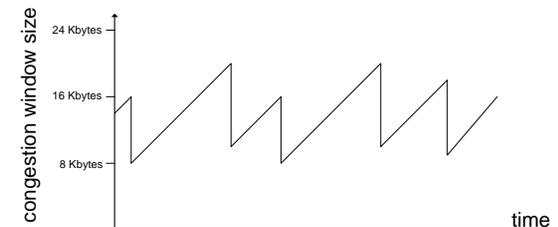

32

TCP Congestion Control: details

- sender limits transmission:

$$\text{LastByteSent} - \text{LastByteAcked} < \text{CongWin}$$

- Roughly,

$$\text{rate} = \frac{\text{CongWin}}{\text{RTT}} \text{ Bytes/sec}$$

- CongWin is dynamic, function of perceived network congestion

How does sender perceive congestion?

- loss event = timeout or 3 duplicate acks
- TCP sender reduces rate (CongWin) after loss event

three mechanisms:

- AIMD
- slow start
- conservative after timeout events

33


TCP Slow Start

- When connection begins, CongWin = 1 MSS
 - Example: MSS = 500 bytes & RTT = 200 msec
 - initial rate = 20 kbps
- When connection begins, increase rate exponentially fast until first loss event
- available bandwidth may be \gg MSS/RTT
 - desirable to quickly ramp up to respectable rate

34

TCP Slow Start (more)

- When connection begins, increase rate exponentially until first loss event:
 - double CongWin every RTT
 - done by incrementing CongWin for every ACK received
- **Summary:** initial rate is slow but ramps up exponentially fast

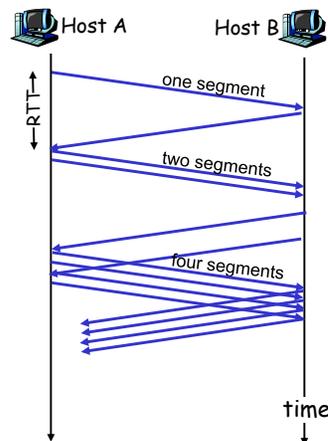

35

Refinement: inferring loss

- After 3 dup ACKs:
 - CongWin is cut in half
 - window then grows linearly
- **But** after timeout event:
 - CongWin instead set to 1 MSS;
 - window then grows exponentially
 - to a threshold, then grows linearly

Philosophy:


- 3 dup ACKs indicates network capable of delivering some segments
- timeout indicates a "more alarming" congestion scenario

36

Refinement

Q: When should the exponential increase switch to linear?

A: When CongWin gets to 1/2 of its value before timeout.

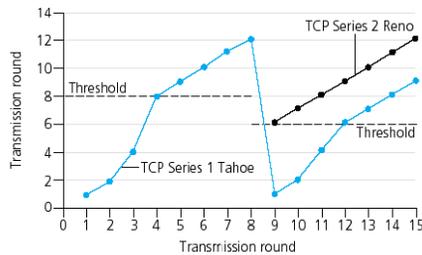

Implementation:

- Variable Threshold
- At loss event, Threshold is set to 1/2 of CongWin just before loss event

Summary: TCP Congestion Control

- When CongWin is below Threshold, sender in **slow-start** phase, window grows exponentially.
- When CongWin is above Threshold, sender is in **congestion-avoidance** phase, window grows linearly.
- When a **triple duplicate ACK** occurs, Threshold set to CongWin/2 and CongWin set to Threshold.
- When **timeout** occurs, Threshold set to CongWin/2 and CongWin is set to 1 MSS.

TCP sender congestion control

State	Event	TCP Sender Action	Commentary
Slow Start (SS)	ACK receipt for previously unacked data	CongWin = CongWin + MSS, If (CongWin > Threshold) set state to "Congestion Avoidance"	Resulting in a doubling of CongWin every RTT
Congestion Avoidance (CA)	ACK receipt for previously unacked data	CongWin = CongWin + MSS * (MSS/CongWin)	Additive increase, resulting in increase of CongWin by 1 MSS every RTT
SS or CA	Loss event detected by triple duplicate ACK	Threshold = CongWin/2, CongWin = Threshold, Set state to "Congestion Avoidance"	Fast recovery, implementing multiplicative decrease. CongWin will not drop below 1 MSS.
SS or CA	Timeout	Threshold = CongWin/2, CongWin = 1 MSS, Set state to "Slow Start"	Enter slow start
SS or CA	Duplicate ACK	Increment duplicate ACK count for segment being acked	CongWin and Threshold not changed

TCP throughput

- What's the average throughput of TCP as a function of window size and RTT?
 - Ignore slow start
- Let W be the window size when loss occurs.
- When window is W , throughput is W/RTT
- Just after loss, window drops to $W/2$, throughput to $W/2RTT$.
- Average throughput: $.75 W/RTT$

TCP Futures: TCP over "long, fat pipes"

- Example: 1500 byte segments, 100ms RTT, want 10 Gbps throughput
- Requires window size $W = 83,333$ in-flight segments
- Throughput in terms of loss rate:


$$\frac{1.22 \cdot MSS}{RTT \sqrt{L}}$$

- $\rightarrow L = 2 \cdot 10^{-10}$ *Wow*
- New versions of TCP for high-speed

41

TCP Fairness

Fairness goal: if K TCP sessions share same bottleneck link of bandwidth R , each should have average rate of R/K

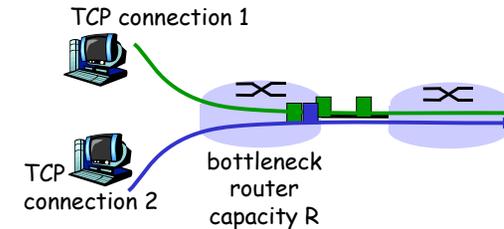


42

Why is TCP fair?

Two competing sessions:

- Additive increase gives slope of 1, as throughput increases
- multiplicative decrease decreases throughput proportionally

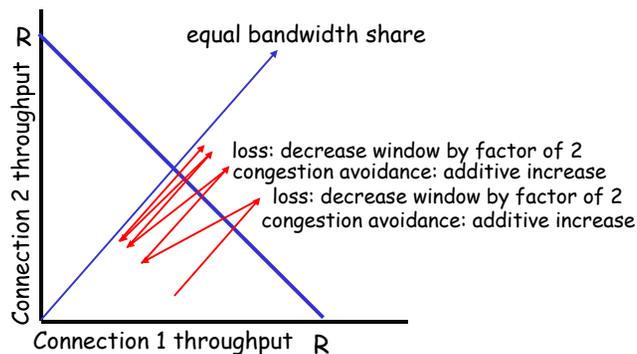

43

Fairness (more)

Fairness and UDP

- Multimedia apps often do not use TCP
 - do not want rate throttled by congestion control
- Instead use UDP:
 - pump audio/video at constant rate, tolerate packet loss
- Research area: TCP friendly

Fairness and parallel TCP connections

- nothing prevents app from opening parallel connections between 2 hosts.
- Web browsers do this
- Example: link of rate R supporting 9 connections:
 - new app asks for 1 TCP, gets rate $R/10$
 - new app asks for 11 TCPs, gets $R/2$!

44