

A STUDY OF FUEL CELL HYBRID AUTO RICKSHAWS USING REALISTIC URBAN DRIVE CYCLES

Mohammed Abu Mallouh¹

Bradley Denman²

Brian Surgenor²

Brant Peppley²

¹ Department of Mechatronics Engineering
Hashemite University
Zarqa, Jordan
mmallouh@hu.edu.jo

² Department of Mechanical and Materials Engineering
Queen's University
Kingston, Ontario, Canada
bradley.denman@queensu.ca, surgenor@me.queensu.ca,
brant.peppley@chee.queensu.ca

ABSTRACT

The popular three-wheeled vehicles known as auto rickshaws are common in Asian cities where due to their older two-stroke engines they have been significant contributors to the current air quality issues that plague the urban areas. Recent changes to four-stroke engines as well as those powered by diesel, compressed natural gas (CNG) or liquefied petroleum gas (LPG) reduce the pollution and greenhouse gas emissions. However, because of the large number of vehicles emission of such vehicles is still an important issue.

Some studies about converting an internal combustion engine (ICE) rickshaw to an electrical or fuel cell rickshaw have been done recently. Most of the rickshaw conversion studies used one of the standard urban drive cycles. Such drive cycles do not accurately portray the demands on a rickshaw. Thus, results with unrealistic drive cycles may be misleading.

In this study a comparison between ICE and hybrid fuel cell rickshaw configuration was done using a realistic drive cycle. An ICE and two candidate fuel cell rickshaw models were created and assessed using the Powertrain System Analysis Toolkit (PSAT) software. Two drive cycles that would closely emulate the true demands on a rickshaw operated in an urban environment were developed in order to more accurately simulate the performance of conventional and fuel cell hybrid rickshaws as a means of determining the current feasibility of fuel cells for use in rickshaws.

KEY WORDS

Rickshaw, fuel cell, PSAT, hybrid vehicle, drive cycle

1. Introduction

Alternative energy solutions received a great deal of attention in the last decade due to the need of sustainable and environmental friendly energy sources. The main pollutant source in urban areas is the emission of vehicles with ICE [1]. Increased concerns over global and local pollution, depletion of fossil fuels, and higher gas prices have motivated ambitious plans for new vehicle types with alternative energy sources. Hybrid electrical vehicles that combine the advantages of two power sources, ICE and electrical motors, have been the focus of attention recently. Nowadays, such vehicles are available in the auto market and are becoming more popular due to high

fuel prices and the increasing concerns about the environment. Fuel cell and electric hybrid driven vehicles is another promising alternative technology. These vehicles have been proposed as the next generation of vehicles since they promise clean performance and show higher energy efficiency than conventional vehicles [2].

Auto rickshaws are one of the most popular vehicles in developing Asian countries where they are used as taxis and to transport goods. In India alone there are about 2.5 millions rickshaws currently on the road and 250,000 new vehicles are sold each year [3]. Figure 1 shows a typical three-wheel auto rickshaw. Due to their small size and maneuverability they are popular method of transportation in large urban centers.

A two or four stroke gasoline engine usually powers these vehicles. Thus, rickshaws are typically highly polluting. In recent years, alternatives such as CNG and LPG models have been introduced to deal with the pollution problem. While these vehicles reduce the amount of particulate matter and other harmful pollutants they do not eliminate them and cities where rickshaws are numerous will continue to have poor air quality. The capital city of New Delhi is one of the most polluted cities in the world although the majority of the public transport is currently based on the CNG technology [4].

Some studies about converting an ICE rickshaw to an electrical or fuel cell vehicle have been done recently. In [5] a photovoltaic battery powered rickshaw was investigated. Results showed the proposed hybrid battery/photovoltaic configuration was more efficient and



Figure 1: Standard three-wheel auto rickshaw

resulted in fewer emissions than the ICE rickshaw. A hybrid fuel cell/battery rickshaw was studied in [4]. Using the Highway Fuel Economy Test as the drive cycle the results showed promise in creating a hydrogen fuel cell vehicle, with respect to both the environment and cost. It is known that the high costs and fuel storage requirements for the fuel cell vehicle have hindered their use in four-wheel light duty vehicles. However, these drawbacks are partially mitigated in a rickshaw since the lower power demand results in a reduced cost for the fuel cell compared to a four-wheel vehicle. Daily rickshaw ranges are between 70 and 150 km with a maximum speed of 60km/hr at most which does not necessitate as much hydrogen to be stored on board for a full run [1].

Most of the rickshaw conversion studies used one of the standard urban drive cycles. Such drive cycles do not accurately portray the demands on a rickshaw since they are primarily located in urban centers where they are subjected to mostly stop-and-go traffic and a large amount of braking and acceleration. In [6] a driving cycle that represents the driving pattern of the auto rickshaw in India was proposed and compared to the India urban drive cycle that is commonly used for rickshaws analysis.

In this study a comparison between ICE and hybrid fuel cell rickshaw configurations was done based on running cost using a realistic drive cycle. Two drive cycles based on [6] were developed in order to more accurately simulate the performance of conventional and fuel cell hybrid rickshaws as a means of determining the current feasibility of fuel cells for use in rickshaws.

2. System Main Components

2.1 Fuel Cell

Fuel cells (FC) are electrochemical devices that convert chemical energy of a reaction directly into electrical energy. Among the various types of fuel cells, Proton Exchange Membrane (PEM) fuel cell has drawn the most attention due to its simplicity, viability, quick start up, higher power density and lower temperature operation [2]. Inputs to a PEM fuel cell are oxygen and hydrogen while the outputs are electricity and water. A PEM fuel cell is capable of using both oxygen directly from air, or purified oxygen. At the anode, hydrogen is electrochemically oxidized to form protons and electrons. At the cathode, oxygen is electrochemically reduced and combined with the protons transported through the membrane and the electrons that pass through an external circuit. The overall reaction in the cell is the electrochemical oxidation of hydrogen to form water. The electrons flowing through the external circuit are capable of performing useful work due to the energy released by reaction [4].

A standalone FC system may not be sufficient to satisfy the load demands, especially during start-up and transient events. Moreover, the FC system would have to supply all of the power demand thus increasing the size and cost of the FC system. As a result, downsizing the FC system and hybridizing it with an energy storage system decreases system cost and improves performance.

2.2 Battery

The two primary battery competitors for use in both electric vehicles and hybrid-electrics are nickel metal hydride (Ni-MH) and lithium-ion (Li-ion). While Ni-MH currently has an edge over Li-ion in terms of production readiness, Li-ion has twice the energy density of Ni-MH [7]. One great advantage of Li-ion batteries is their low self-discharge rate of only approximately 5% per month approx compared to over 30% per month and 20% per month in nickel metal hydride batteries and nickel cadmium batteries respectively [7].

3. Auto Rickshaw Configuration Models

3.1 Conventional ICE Rickshaw

A Mahindra Alfa is a three-wheel rickshaw that is powered by a diesel engine. Figure 2 shows the PSAT generated configuration of the conventional vehicle and its components. Table 1 provides the primary auto rickshaw specifications used in the vehicle model from manufacturer specifications and experimental results.

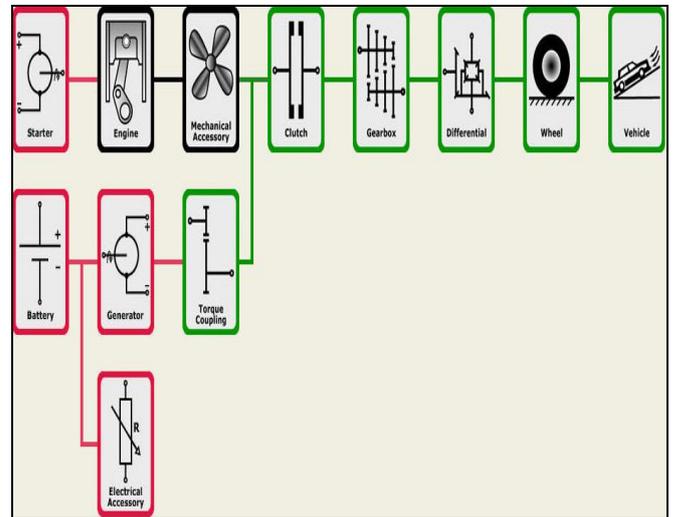


Figure 2: PSAT component configuration for conventional rickshaw

Table 1: Auto rickshaw parameters used in the model as taken from [6] and [8].

Engine Type	4-stroke, Single Cylinder, diesel
Max. Power (kW)	5.51 KW \pm 5% @ 3600 rpm
Max. Torque (Nm)	16.7 Nm \pm 5% @ 2200-2800 rpm
Transmission	Constant Mesh, 4 Forward
Tire Size	4.50" x 10", 8PR
Maximum Speed	53 km/h
Battery	12 V, 50 Ah
Headlights	2 x 35 W
Fuel Capacity	10.5 L
Max GVW	800 kg
Curb Weight	480 kg
Frontal Area	2.09 m ²
Coefficient of Drag	0.5
Max Acceleration	2.1 m/s ²
Average Payload	100 kg

3.2 Fuel Cell Hybrid Rickshaw

A hybrid configuration was selected in order to utilize a lower power PEM FC. The FC provides power to the vehicle's motor and battery. PSAT can only create a series fuel cell hybrid vehicle configuration therefore no parallel configurations have been tested. Figure 3 shows the configuration for the fuel cell hybrid rickshaw.

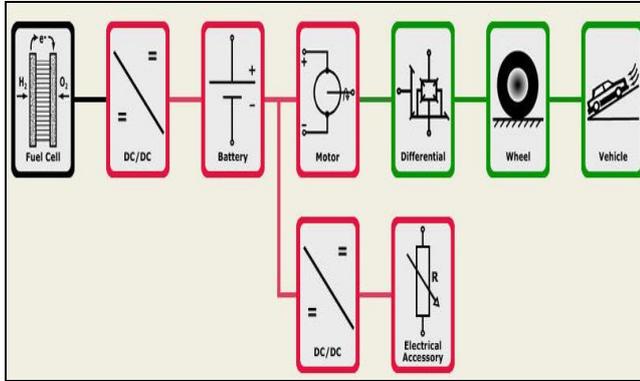


Figure 3: PSAT component configuration for series fuel cell hybrid rickshaw

It is expected that the fuel cell will be the most critical component in the hybrid configuration. In order to match the performance of the conventional diesel rickshaw the power supply of the hybrid must be appropriate. The effect of the FC power was investigated by considering two sizes of the PEM FC. An 8.8 kW high power rickshaw configuration where the bulk of the vehicle power is provided by the FC and a 4.4 kW FC low power version that would only be able to provide part of the power when the maximum is demanded. FCs with both specifications are commercially available [9].

Onboard hydrogen fuel is in the form of pressurized gas with a mass of 1.79 kg in a 38 kg cylinder. Li-ion batteries were integrated into the models with a capacity of approximately 8.4 kWh. With the batteries there is a concern when it comes to deep discharging and its effect on capacity over time. Therefore a maximum discharge has been considered to be a drop in the state of charge (SOC) by 40% in order to maintain their lifespan.

An AC electric induction motor with an 8 kW maximum power output was selected based upon the specifications of the conventional rickshaw. Additionally the DC/DC converters operate at an efficiency of 95%. A single final drive differential was selected as opposed to a full transmission, which reduces the overall weight of the vehicle. The rickshaw, however, was not entirely changed from the specifications of the conventional model. Passenger and driver masses were also kept the same to maintain a direct comparison between the conventional and FC hybrid models.

4. Drive Cycles

A drive cycle is the series of conditions a vehicle will experience in a set amount of time that can be used a reflection of the conditions over a longer period of time. The drive cycle defines when the vehicle is at rest, accelerating, decelerating or at a constant speed. Most

existing drive cycles were designed for four-wheel light duty vehicles. The maximum acceleration, deceleration and top speed in such drive cycles are above the capabilities of rickshaws. Thus such drive cycles do not accurately portray the demands on a rickshaw. In [6] new drive cycles for rickshaws in India were designed. The new drive cycles were developed using GPS data that was collected from rickshaws in operation. The study looked at rickshaws driving in New Delhi at different times and developed daytime and evening drive cycles.

In this study two drive cycles were designed based upon the results presented in [6]. The daytime drive cycle was based upon the periods of peak traffic when speeds were limited. By comparison the evening cycle allows for higher speeds when there is less traffic on the roads and shorter stop durations. The statistics of both drive cycles and the India urban drive cycle that is usually used in rickshaw analysis are shown in Table 2.

Table 2: Drive cycles statistics

Parameter	India Urban cycle	Day cycle	Evening cycle
Time (s)	2689	5650	4849
Distance (km)	17.4	8.7	17.40
Maximum Speed (km/h)	62.2	44.0	49.96
Average Speed (km/h)	23.3	5.5	12.92
Maximum Acceleration (m/s^2)	1.7	7.0	7.0
Maximum Deceleration (m/s^2)	-2.1	-7.0	-7.0
Average Acceleration (m/s^2)	0.3	0.8	1.02
Average Deceleration (m/s^2)	-0.4	-0.9	-1.0449
Idle Time (s)	267	405	222
Number of Stops	52	31	31

5. Simulation Results

The ICE conventional rickshaw model was designed to replicate the baseline for comparison to all the alternative powered vehicles. The main results for comparison based upon the rickshaw drive cycles are displayed in Table 3. The "LP FC" and "HP FC" columns represent the low and high power FC hybrid configurations. "Conv" represents the conventional model.

5.1 Comparison of Drive Cycles

The three drive cycles described in Section 4 were simulated using the conventional vehicle model. Results are shown in Table 3. There was a distinctive difference between the two developed realistic drive cycles and the mainstream cycle. The fuel economy for the India Urban cycle was significantly less than that of the two other cycles. Based upon a typical rickshaw routine the conventional rickshaw needs additional fuel every day. This conflicts with the India Urban cycle results that

indicate that a rickshaw could travel for almost three days without refueling. It is unrealistic to expect that in heavy traffic with a great deal of acceleration and braking that a conventional rickshaw would achieve a remarkable 2.43 L/100 km diesel fuel economy when loaded with passengers. The intensity of the two developed cycles is made clear from the high demands for fuel and significant amounts of exhaust shown in the simulation results. Based upon the results from the developed cycles the need for refueling is greater, which more accurately portrays the usage of auto rickshaws in urban Indian streets. The intensive drive cycle shows a marked increase in rate of carbon dioxide released which are higher than that reported in [10], which indicated that a typical four-stroke gasoline auto rickshaw would release 78.5 g/km.

5.2 LP FC versus HP FC

As shown in Table 3 the LP FC configuration has better fuel economy, cost/km, and range than the HP FC configuration for both daytime and evening drive cycles. While both configurations utilized the braking energy almost at equal percentage, the electrical consumption in the case of the HP FC configuration was negative. This negative value indicates that the HP FC configuration inevitably wastes fuel by charging the battery when it is already sufficiently charged. On the other hand while the LP FC configuration provided just enough power to keep the SOC constant it was still greater than was required. The first 80 seconds of the daytime drive cycle is plotted in Figure 4, in it the speeds and accelerations are relatively low and the intensity of the drive cycle is at a minimum.

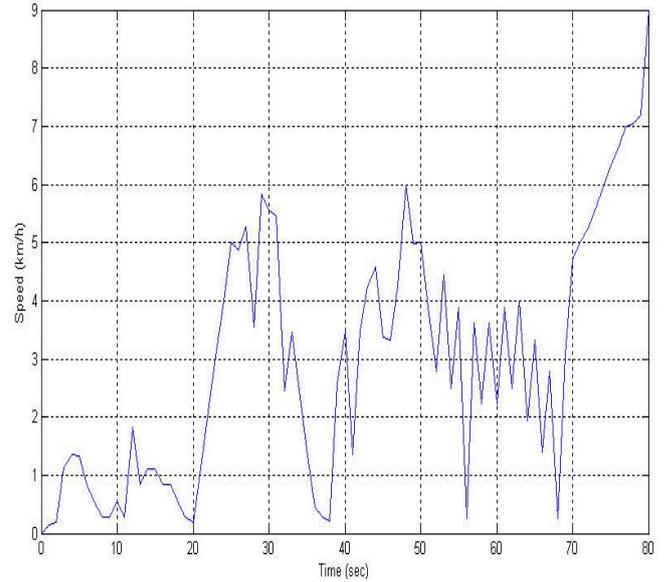


Figure 4: Speed versus Time for the Daytime Drive Cycle Simulation

Figures 5 and 6 show the plot of the power outputs with respect to the same eighty seconds of the daytime drive cycle. The fuel cell output approaches its peak power and is used in greater proportion than the batteries are despite the low power requirements. The emphasis on the fuel cell in both the LP and HP FC models results in greater fuel consumption than may have been required if the control strategy were optimized for greater hybridization. The LP FC configuration was found to be better than the HP FC configuration in almost every aspect, thus it will be used for comparison with the conventional configuration.

Table 3: Summary of Simulation Results

Result	Conventional			LP FC		HP FC	
	India Urban Cycle	Day Cycle	Evening Cycle	Day Cycle	Evening Cycle	Day Cycle	Evening Cycle
Fuel Economy (L/100km)	2.4	6.2	4.3	44.9	36.2	50.7	42.1
Fuel Economy Gasoline Equivalent (L/100km)	2.7	6.9	4.8	3.0	2.5	3.4	2.9
Range based on fuel capacity (km)	432.1	170.2	244.8	268.6	332.5	237.7	286.5
CO ₂ Emissions (g/km)	64.8	164.7	114.5	0	0	0	0
Final SOC (%)	NA	NA	NA	69.18	68.99	70.07	71.69
Distance Traveled (km)	16.1	7.6	15.0	8.1	16.1	8.1	16.1
Percentage of Braking Energy Recovered at Battery (%)	0	0	0	4.9	11.3	5.6	11.5
Fuel Mass Consumed (kg)	0.3281	0.3894	0.5384	0.0655	0.1050	0.0739	0.1218
Electrical Consumption (Wh/km)	NA	NA	NA	8.4	4.8	-1.4	-9.9

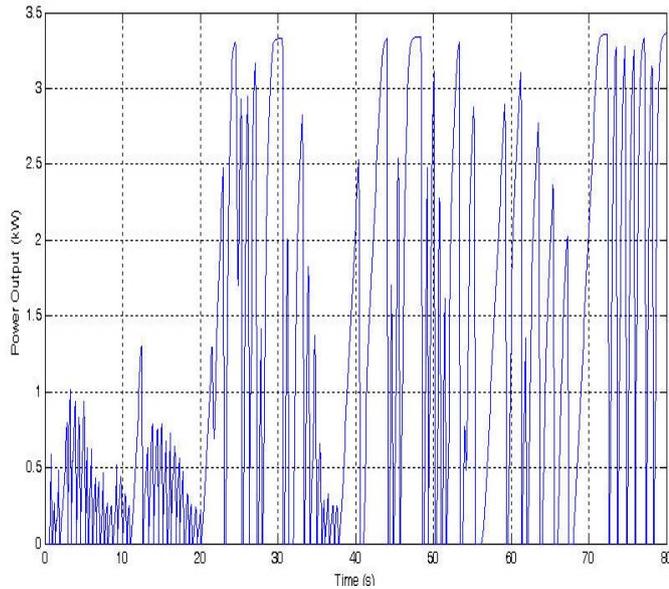


Figure 5: FC output versus time for LP FC model on daytime drive cycle

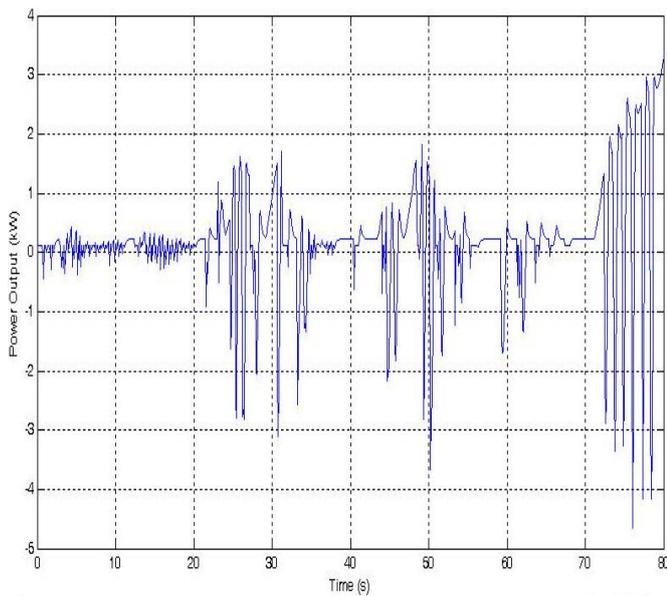


Figure 6: Battery output versus time for LP FC model on daytime drive cycle

5.3 Fuel Cell versus Conventional Models

During the daytime drive cycle, as shown in Table 3, the gasoline equivalent fuel economy and range for the LP FC was better than the conventional model by 57% and 58%, respectively. For the evening drive cycle it was 48% and 36% better. The conventional configuration releases 164.65 and 114.47 g/km of carbon dioxide for the daytime and evening drive cycles respectively while there are no vehicular emissions of carbon dioxide for either FC configuration. Thus the LP FC configuration is better than the conventional configuration when

considering both the performance efficiency and the environment.

The running cost per km was calculated based upon standard rates. The cost per liter of diesel fuel is 32.86 Rs/L [11], electricity is sold at an average rate of 4.8 Rs/kWh [12] and the cost of hydrogen when converted into Rupees is 240 Rs/kg of hydrogen [13] using an exchange rate of 48 Rs to 1 USD. It was estimated that the charging process would be approximately 90% efficient therefore there is a loss factor equal to 1.1. The respective costs per kilometer of travel for the two drive cycles are listed in Table 4. The values were calculated based upon the equation of $\text{Cost/km} = (\text{Fuel Consumed} \times \text{Fuel Price} + \text{Electricity Consumption} \times \text{Loss Factor} \times \text{Cost of Electricity}) / \text{Distance Traveled}$.

Table 4: Cost/km for each rickshaw model

Vehicle Model	Cost (Rs/km)	
	Daytime cycle	Evening cycle
Conventional Rickshaw	1.68	1.18
Low power Li-ion Rickshaw	1.98	1.59
High power Li-ion Rickshaw	2.19	1.91

The LP FC configuration cost/km was 18% and 35% more expensive than the conventional model for the daytime and evening cycles, respectively. On a daily basis the cost would be approximately 30 to 41 Rs more expensive for the LP FC model than the conventional. This is mainly due to the higher cost of hydrogen compared to diesel fuel in India. In order to decrease the cost/km the use of the hydrogen has to be reduced. It is expected that utilizing the batteries more than the fuel cell will reduce the hydrogen consumption and in turn the cost per kilometer. Altering the control strategy to activate the fuel cell only after the batteries have been drained to a sufficient point after which all the power will be supplied by the fuel cell and the battery will recharge can do this. Less reliance on the hydrogen and more on the electricity is a critical parameter to any control scheme modifications. The fuel cell must be used only when recharging is required and emphasize it as a range extender as opposed to the primary source of power. While these modifications will improve the fuel cell model's economic feasibility the price of diesel must also increase by 50% to make the fuel cell alternative more viable based upon the costs.

6. Conclusions

A study of auto rickshaw conversion using a realistic drive cycle was conducted. The intensity of rickshaw driving is captured more accurately by the two developed drive cycles as opposed to a standard urban drive cycle.

It was found that the LP FC configuration is better than the HP FC model in both performance and cost. The significant advantage of both FC models compared to ICE rickshaws is their lack of carbon dioxide emissions.

However, the operating cost of FC hybrid rickshaws is significantly higher than the conventional one. Since most rickshaws are privately owned and do not generate significant income the higher initial investment and operating costs currently make it an unrealistic option. The combination of a reduction in hydrogen consumption and increase in diesel and fossil fuel prices by 50% is needed to make the current technology more viable in the application. These changes together with decreasing costs in fuel cell technology will result in more favorable economics that will generate more consumer interest.

NOMENCLATURE

CNG	compressed natural gas
LPG	liquefied petroleum gas
ICE	internal combustion engine
Ni-MH	nickel metal hydride
Li-ion	lithium-ion
FC	fuel cell
PEM	proton exchange membrane
SOC	state of charge

REFERENCES

- [1] Y. Wu, B. Chen and K. D. Huang, The effect of control strategy and driving pattern on the fuel economy and exhaust emission of a hybrid electrical bus, *SAE Advanced Hybrid Vehicle Powertrains (SP-2153)*, Paper 2008-01-0306, Detroit, Michigan, 2008.
- [2] M. C. Kisacikoglu, M. Uzunoglu and M. S. Alam, Fuzzy logic control of a fuel cell/battery/ultra-capacitor hybrid vehicular power system', *Proc. IEEE Vehicle Power and Propulsion Conference*, Arlington, Texas, 2007, 591-596.
- [3] P. Mulhall, M. Naviwala, S. M. Lukic, J. Braband and A. Emadi, Entrepreneurial projects program at Illinois Institute of Technology: solar/battery hybrid three-wheel auto rickshaw for India, *Proc. IEEE Vehicle Power and Propulsion Conference*, Arlington, Texas, 2007, 682-689.
- [4] M. S. Alam, T. Moeller and A. Maly, Conversion of an Indian three wheeler scooter into hybrid fuel cell Ni-MH battery vehicle and validation of the Vehicle model for the Baja three wheeler scooter, *Proc. IEEE Conference on Electric and Hybrid Vehicles*, Pune, India, 2006.
- [5] Y. Gurkayank, O. Onar and A. Khaligh A photovoltaic-battery powered all-electric rickshaw for Indian market, *SAE Advanced Hybrid Vehicle Powertrains (SP-2153)*, Paper 2008-01-0308, Detroit, Michigan, 2009.
- [6] S. Lukic, P. Mulhall, G. Choi, M. Naviwala, S. Nimmagadda, and A. Emadi "Usage pattern development for three-wheel auto rickshaw taxis in India, *Proc. IEEE Vehicle Power and Propulsion Conference*, Arlington, Texas, 2007, 610-616.
- [7] M. Alam , T. Taher, M. Khader, A. Lateef, R. Kizilel, Analysis and hardware development of a novel prototype hybrid PEM fuel cell Li-Ion battery scooter, *Proc. IEEE Conference on Electric and Hybrid Vehicles*, Pune, India, 2006.
- [8] Mahindra Alfa passenger, diesel 3 wheeler in India, 4 stroke diesel engine passenger (specifications), www.mahindrasmallcv.com.
- [9] Ballard 9SSL, Integration guide.
- [10] Mittal, M.L., Sharma, C., Anthropogenic emissions from energy activities in India: generation and source characterization (Part II: emissions from vehicular transport in India), http://www.osc.edu/research/pcrm/emissions/India_Report_1Pagelayout.pdf, 2003.
- [11] Weeks Update India, "New petrol/diesel price India New Delhi, Mumbai, Bangalore, Chennai, Kolkata", <http://weeksupdate.com/2009/07/new-petrol-diesel-price-india-new-delhi.html>, 2009.
- [12] Corporate Catalyst India, "Cost of doing business in India, <http://www.cci.in/pdf/cost-of-doing-business-india.pdf>, 2007.
- [13] M. Qadrdan and J. Shayegan "Economic assessment of hydrogen fueling station, a case study for Iran" Sharif Energy Research Institute (SERI), Sharif University of Technology, 2008.